



Lighting Systems

Large Deep Wallpack

Features


The JK Lighting Large Deep wall pack is UL listed for wet locations.

Housing


The housing is manufactured of heavy duty die cast aluminum with a powder coated dark bronze finish and a hinged door frame. A weatherproof silicone gasket is present for moisture and dust proof protection. Fixture includes a anodized aluminum reflector and high impact heat resistant borosilicate glass for optimum light distribution. Housing comes with threaded 1/2" apertures for securing conduit and or photo cell installation. Fixture wall-mounts directly over 4" outlet box.

Applications

- Warehouse facilities
- Shipping and receiving areas
- Cold storage facilities
- Industrial plants
- Commercial buildings

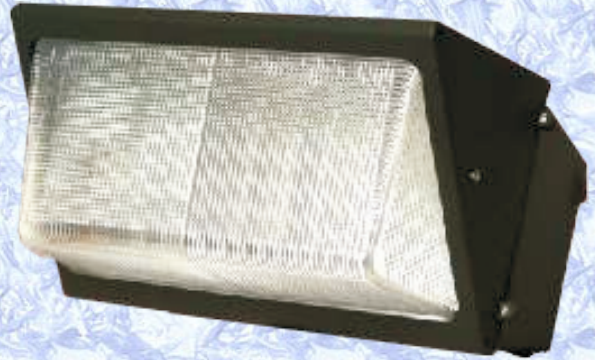

ISO9002 Compliant

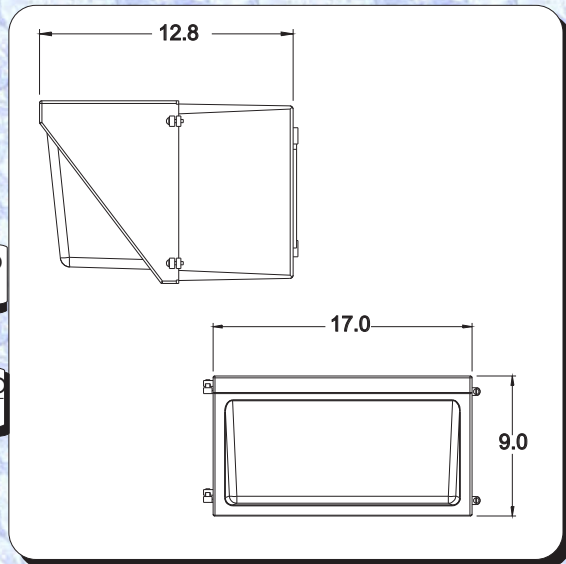

Wattage	Lamp Life	Lumens	Start Time	CRI	Kelven Temp
80	100000	6000	<.5 SEC	80	3500,4100,5000

Wattage	Lamp Life	Lumens	Start Time	CRI	Kelven Temp
100	100000	8000	<.5 SEC	80	3500,4100,5000

Select an appropriate choice from each column

Typical ordering number

Typical ordering number (Large)

JK-80-IND-LDWP-MT-PC

Also available in HID applications

Prefix	Wattage	Lamp Type	Fixture Type	Voltage	Options
JK	80 100	IND = Induction	LDWP- Large Deep Wall Pack	120v MT 480v	PC = Photocell F = In-Line Fuse

SPECIAL NOTE:
When Ordering a Photocell the voltage must be designated.

Lamp Included